



Rec'd PTO 10 DEC 2004 #2



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office

Concept House

Cardiff Road 20 JUN 2003

Newport

South Wales PCT

NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Stephen Hordley

Dated

28 April 2003

BEST AVAILABLE COPY

BEST AVAILABLE COPY

THE PATENT OFFICE

28 JUN 2002

NEWPORT

The
Patent
Office28JUN02 E729443-4 D00790
P01/7700 0.00-0214959.9

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

1. Your reference

ABM.PA 4493

28 JUN 2002

2. Patent application number

(The Patent Office will fill in this part)

28 JUN 2002

0214959.9

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*Textron Fastening Systems Limited
Mundells
Welwyn Garden City
Herts AL7 1EZ
UKPatents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

749929600

4. Title of the invention

Split Die Groove Maker

5. Name of your agent *(if you have one)*

SOMMERVILLE & RUSHTON

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*45 Grosvenor Road
St Albans
Herts AL1 3AWPatents ADP number *(if you know it)*

1511001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number
*(if you know it)*Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))*

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6

Claim(s) 3

Abstract 1

Drawing(s) 18

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

Andrew B Mackenzie

27 June 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Andrew B Mackenzie
01727 854215

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

SPLIT DIE GROOVE MAKER

The invention relates to a method of forming a tubular fastener, and more particularly to a method of forming a radially expandable externally grooved tubular fastener from metal.

Such fasteners are used to fasten together two or more workpieces by inserting a fastener in a suitable aperture through the workpieces, and radially expanding at least part of the tubular fastener so as to engage the workpieces. Commonly the tubular fastener is provided with a radially enlarged head at one end which contacts the face of the nearer workpiece. In this case the fastener may engage all of the workpieces, or only the workpiece most remote from the head. Radial expansion of the tubular fastener may be achieved by pushing or pulling through its bore the head of a mandrel.

Such fasteners and their method of installation are well-known in the mechanical assembly industry.

The present invention aims to provide an improved and simplified method of forming such fasteners, needing few manufacturing operations.

The invention provides, in one of its aspects, a method of forming a radially expandable externally grooved tubular fastener from metal, as defined in claim 1 of the accompanying claims. Further preferred features of the present invention are set out in claims 2 to 16. The invention includes a fastener manufactured by a method according to the invention.

Some specific embodiments of the present invention will now be described by way of example and with reference to the accompanying drawings, in which:-

Figures 1A to 1N illustrate a first method;

Figures 2A to 2K illustrate a second method;

Figures 3A to 3M illustrate a third method; and

Figures 4A and 4B, 5A and 5B, and 6A and 6B illustrate possible alternative groove configurations for a formed tubular fastener.

5 In Figures 1, 2 and 3, the individual figures suffixed "A", "B", "C" etc. through to "K" are, in general, corresponding views respectively on the three example methods.

Referring first to the method illustrated in Figures 1A to 1N, Figures 1A and 1B show the blank used, Figure 1A being an axial section on the line 1A-1A of Figure 1B, and Figure 1B being a cross-section on the line 1B-1B of Figure 1A. (Most of the
10 remainder of the figures are also in such pairs, one of which is an axial section and the other of which is a cross-section, as is common in engineering drawing practice. Since the reader will be familiar with this, this relationship between the figures of each pair will not be further referred to). The blank 11 has an elongated tubular body wall 12 with a radially enlarged head 13 (in a so-called "pan head" shape at one end).
15 The blank has a cylindrical bore 14 extending throughout its entire length, to provide an internal tubular wall surface 15. The tubular wall 12 has a cylindrical outer surface wall 16.

It will be appreciated that the bore 14 and/or walls 12 and 15 may have non-cylindrical shapes such as tri-roundular or hexagonal shapes.
20

The internal wall face 15 of the blank is supported on a cylindrical support pin 17 (Figures 1C and 1D) which is a close fit in the bore 14.

25 Outside the tubular wall 12 there are then provided four external die members 18 in the form of a split die. The blank is inserted between them so that (as shown in Figure 1C) the underside of the head 13 abuts one set of end faces of the members 18, the other ends of which project beyond the tail end of the tubular wall 12 of the blank. The inner face of each member 18, which faces towards the external wall 16
30 of the body 12, is formed with grooves 19. The members 18 are initially spaced slightly apart, to provide a space 21 into which the body wall 12 of the blank can be introduced with clearance, as shown in Figures 1C and 1D. There is a radial gap 22 between adjacent die members 18.

35 The tubular wall 12 of the blank is then radially squeezed, as illustrated in Figures 1E and 1F, by forcing the four die members 18 radially inwardly towards the support

pin 17, in the directions indicated by the arrows A in Figure 1F. The grooved faces of the die members engage the external wall surface 16 of the tubular body wall 12 of the blank, to deform it. The internal wall 15 of the blank is prevented from moving radially inwardly by the contact with the rigid support pin 17. The radially outer part of the body wall 12 is deformed so that it becomes substantially complementary in shape to the shape of the grooves 19 in the die members 18, so that the external surface wall 16 of the tubular body is formed with circumferential grooves 23 (see Figure 1G). As shown in Figure 1F, the four die members 18 are closed together only so far as to leave a reduced radial gap 22 between each and the next. These gaps accommodate, and help to form, protrusions 24 which project radially outwardly from the thread formed on the blank. These arise due to the squeezing action on the metal of the tubular wall 12, and are shown in Figure 1F. They are shown on an enlarged scale in Figure 1M (which is an enlargement of the part of Figure 1F indicated), and also in Figure 1L, which is an enlarged partial section on the line X-X of Figure 1F. The protrusions 24 are formed in the valleys of the grooves 23 on the wall of the blank and extend radially outwardly to slightly beyond the crests of the grooves. It will be appreciated that the protrusions 24 need not extend beyond the crests of the grooves 23.

An alternative arrangement is illustrated in Figure 1N, which is an enlargement corresponding to Figure 1M. In this alternative, side walls of each die 18 are further apart, so that when the grooves 23 on the blank are fully formed, the adjacent walls of the dies 18 are in contact with each other, as illustrated in Figure 1N. However, a suitable space 25 is left adjacent the grooved faces of the dies, to accommodate the protrusions 24.

The four dies are then drawn apart again, as illustrated in Figures 1G and 1H, with directions indicated by the arrows B in Figure 1H. This releases the grooves 23 which have been formed on the external surface of the tubular body 11 from inter-engagement with the grooves 19 in the die members. The support pin 17 can then be withdrawn axially from between the dies, carrying the blank with it. The blank can then be pushed off the pin, to leave the formed blank as shown in Figures 1J and 1K.

The term "blank" is used at this stage, as a matter of consistency and convenience. It may be that the tubular fastener has been fully manufactured at this stage.

Alternatively it may be that the grooved blank is subject to further manufacturing stages, for example heat treatment and/or surface treatment.

5 A second example of the method according to the invention is illustrated in Figures 2A to 2K, which as previously mentioned correspond to Figures 1A to 1K respectively, like parts being indicated by like reference numerals. This second method is generally similar to the first method, and may be considered as a modification thereof. Accordingly the second method will be described in detail only where it differs from the first.

10

As shown in Figure 2A, the head 13 of the blank 11 is formed with a counterbore 26. The end face 34 of support pin 17 (Figure 2C) is in contact with the end face 35 of expander pin 36 which is formed with expander part 27 of larger diameter, merging with the diameter of the support pin by a conical taper 28. The four dies 18 are initially closed together so that there are no radial gaps between their side faces, and their radially inner grooved surfaces provide a small gap with the external wall 16 of the tubular body wall 12 of the blank, as illustrated in Figures 2C and 2D. The support pin 17 is then pulled with respect to the blank, in the direction towards the head 13 of the blank, i.e. upwards as shown in Figure 2C. The taper 28 and then the expander portion 27 progressively enter the bore 14 of the blank. The blank is prevented from moving axially upwards by a support tool 29 which contacts the blank head 13 and which takes up the reaction force. The tubular body wall 12 is thus radially expanded, so that its outer part is squeezed into the grooves 19 in the die members, thus forming external circumferential grooves in the tubular wall. The counterbore 26 within the head 13 of the blank accommodates the expander portion 27, so that the head 13 is not radially expanded. This is the position illustrated in Figures 2E and 2F. Since there are no radial gaps between the dies 18, no protrusions from the grooved external face of the blank are formed. The dies 18 are then withdrawn radially, as shown in Figures 2G and 2H, and the externally grooved blank is pushed off the expander section 27 to provide the result illustrated in Figures 2J and 2K. Protrusions may be formed by leaving radial gaps between the dies as for the first method described above.

35 The third example method shown in Figures 3A to 3M may be considered as combining features of the first two methods, in that it combines an effective

decrease in the diameter of engagement of the external die surfaces and an increase in the diameter of engagement of the internal support.

As shown in Figures 3A and 3B, the blank 11 is identical with that shown in Figures 2A and 2B and used on the second example method. Likewise the support pin 17 is joined by a taper 28 to an expander position 27 of enlarged diameter. As shown in Figures 3C and 3D, initially the blank is placed on the support pin 17 and inserted between the grooved inner walls of the dies 18. The dies are then advanced radially inwardly to the position shown in Figures 3E and 3F, in which the ridges between the grooves in the dies partially enter the outer surface wall 16, as shown in Figures 3E and 3F, and more clearly in the enlargement in Figure 3L. The body wall 12 is supported against inward deformation by the support pin 17. The support pin 17 is then pushed axially upwards into the tubular blank, against the reaction of a support tool 29 contacting the head 13 of the blank, so that the expander portion 27 enters the bore of the tubular wall 12 and radially expands it. The outer part of the wall material is thus forced into the grooves in the dies, as illustrated in Figures 3G and 3H. As shown in enlargement Figure 3M, the material may not completely fill the grooves in the dies.

The dies are then withdrawn radially to release engagement with the blank, which is then pushed off the expander portion 27 to provide the result illustrated in Figures 3J and 3K. As shown in Figure 3H, when the dies 18 are together, there are radial gaps 22 between them, so that as shown in Figures 3J and 3K protrusions 24 are thrown up.

In the foregoing examples, the material of the blank is aluminium 5052, containing 2.5% magnesium. After forming, the length of the tubular body or shank is 7.0mm, its external diameter is 3.4mm, the internal diameter of its bore is 1.6mm, the diameter of the head is 6.0mm, and the thickness of the head is 0.9mm. It will be noted that other materials and/or dimensions may be used.

The invention is not restricted to the details of the foregoing examples. For instance, by providing grooves 19 of suitable form on the inner faces of the die members 18, external grooves of the other desired configurations may be formed on the external tubular wall of the blank. Thus, Figures 4A and 4B illustrate a fastener with a helical groove 31, which provides a screw-thread (which could be considered as comprising

a number of circumferential or near-circumferential grooves joined together to form a helical groove). There may be an unthreaded portion 33 at one or both ends of the threaded portion. If such a helical thread were formed by the method of the first foregoing example, radial protrusions would be formed, which would provide
5 resistance to unscrewing the installed fastener. This is illustrated in Figures 5A and 5B. Figures 6A and 6B illustrate a fastener with longitudinal grooves 32. The method of the present invention provides for the formation of a tubular fastener with grooves of all these, and other, configurations.

Claims

1. A method of forming a radially expandable externally grooved tubular fastener from metal, comprising the steps of:-
- 5 providing a suitable tubular blank having a tubular wall;
- and squeezing the tubular wall between an internal member with a surface which engages the internal tubular wall face of the blank and a plurality of
- 10 external members provided with suitably shaped surfaces engaging the external tubular wall face of the blank;
- thereby to form grooves on the external tubular wall face of the blank.
- 15 2. A method as claimed in claim 1, in which the squeezing is achieved by the effective decrease in diameter of the engagement of the suitably shaped surfaces of the external members with the external tubular wall face of the blank.
- 20 3. A method as claimed in claim 1, in which the squeezing is achieved by the effective increase in diameter of the internal member with the internal tubular wall face of the blank.
- 25 4. A method as claimed in claim 1, in which the squeezing is achieved by both the effective increase in diameter of the engagement of the internal tubular member with the internal tubular wall face of the blank and the effective decrease in the diameter of engagement of the suitably shaped surfaces of the external members with the external tubular wall face of the blank.
- 30 5. A method as claimed in claim 1 or claim 2, in which the internal member engages the internal tubular wall of the blank as aforesaid at an unchanging diameter, and the external members are progressively closed on to the external wall face of the tubular blank to form grooves thereon as aforesaid and are then withdrawn from engagement with the external tubular wall face
- 35 of the blank thereby to release the grooved blank.


6. A method as claimed in claim 5, in which the external members when closed on to the external tubular wall face of the blank form grooves thereon as aforesaid and also form a plurality of radially extending lugs or other protrusions thereon.
- 5
7. A method as claimed in claim 6, in which the external members are closed on to the external tubular wall face of the blank so as to leave a space between each member and the next, thereby to accommodate the protrusions from the grooves.
- 10
8. A method as claimed in claim 7, in which the opposed walls of adjacent external members which define the spaces between them also assist in forming the protrusions.
- 15
9. A method as claimed in claim 1 or claim 3, in which the external members are initially closed together in a predetermined spatial relationship to each other, and the internal member engages the internal tubular wall face of the blank with an increasing diameter, thereby to radially expand the tubular wall into the shaped surfaces of the external members which engage it, and the external members are then withdrawn from engagement with the external tubular wall face of the blank so as to release it.
- 20
10. A method as claimed in claim 9 in which the external members remain in the same aforesaid spatial relationship with each other until they are withdrawn as aforesaid to release the blank.
- 25
11. A method as claimed in claim 4 or claim 9, in which the external members are first progressively closed on to the external tubular wall face of the blank to as to engage it as aforesaid and at least partially form grooves in it, and the internal member engages the internal tubular wall face of the blank with an increasing diameter, thereby to assist in the formation of the grooves.
- 30
12. A method as claimed in claim 3 or claim 9, in which the internal member has an external diameter which varies along its length, and is moved axially with respect to the tubular blank thereby to increase the diameter which engages the internal tubular wall face of the blank as aforesaid.
- 35



13. A method as claimed in any of claims 1 to 12, in which the grooves on the external tubular wall face of the blank are in the form of circumferential grooves.
- 5
14. A method as claimed in any of claims 1 to 12, in which the grooves on the external tubular wall face of the blank are in the form of a screw thread.
15. A method as claimed in any of claims 1 to 12, in which the grooves on the external tubular wall of the blank are in the form of longitudinal grooves.
- 10
16. A method of forming a radially expandable tubular fastener substantially as hereinbefore described with reference to Figures 1A to 1N, or Figures 2A to 2K, or Figures 3A to 3M, of the accompanying drawings.
- 15
17. A fastener formed by a method as claimed in any of the preceding claims.
18. A fastener, substantially as hereinbefore described with reference to, and illustrated in, Figures 1J and 1K, or Figures 2J and 2K, or Figures 3J and 3K, or Figures 4A and 4B, or Figures 5A and 5B of the accompanying drawings.
- 20



Abstract

5 A method of forming a radially expandable externally grooved tubular fastener from metal, comprising the steps of providing a suitable tubular blank having a tubular wall and squeezing the tubular wall between an internal member with a surface which engages the internal tubular wall face of the blank and a plurality of external members provided with suitably shaped surfaces engaging the external tubular wall face of the blank thereby to form grooves on the external tubular wall face of the blank.

10

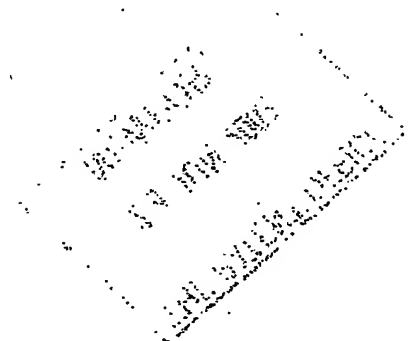

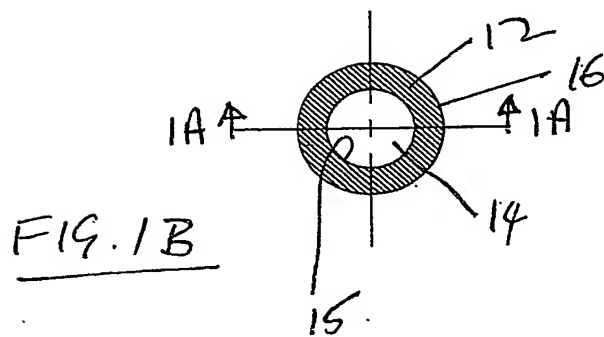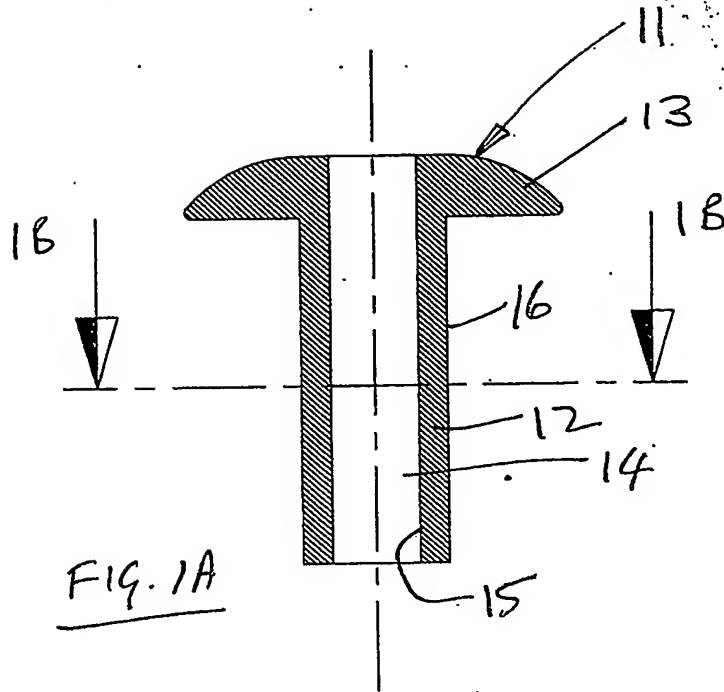

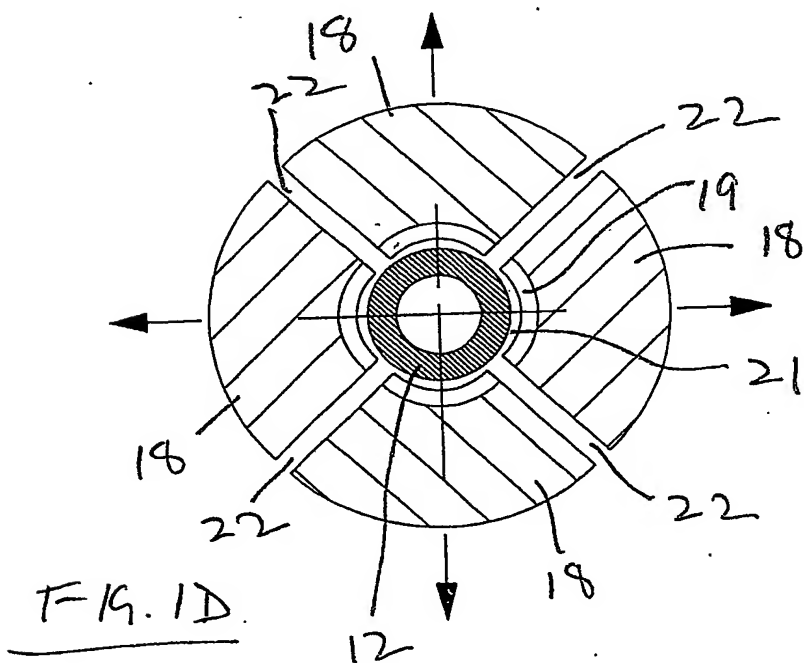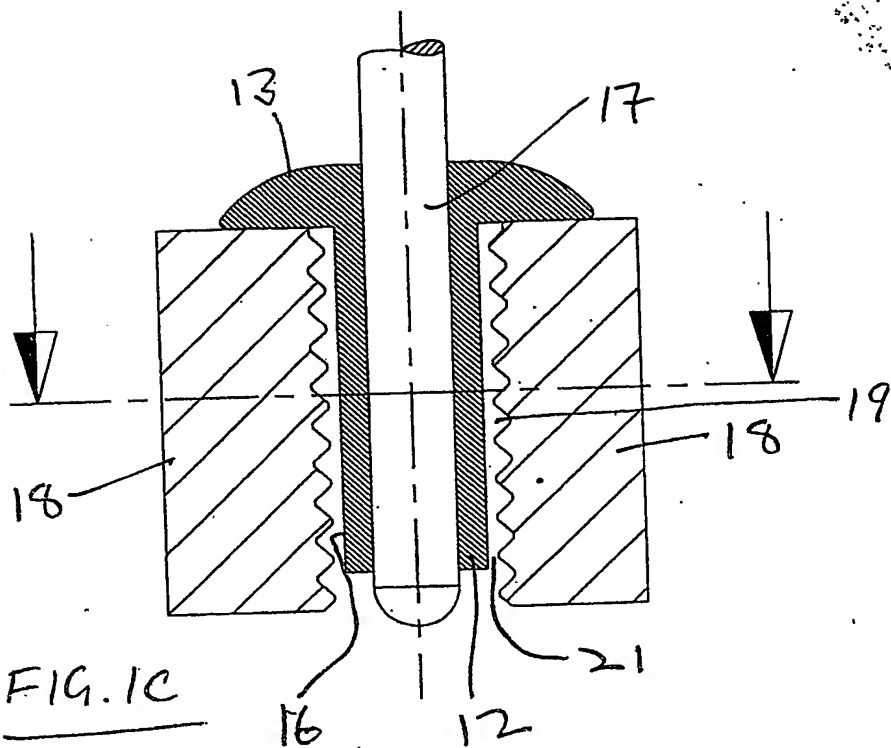

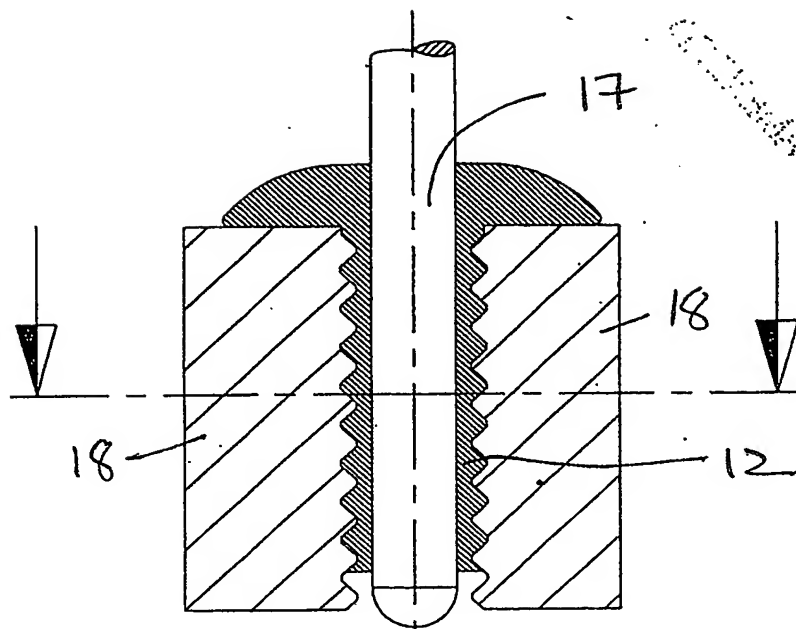


FIG. 1E

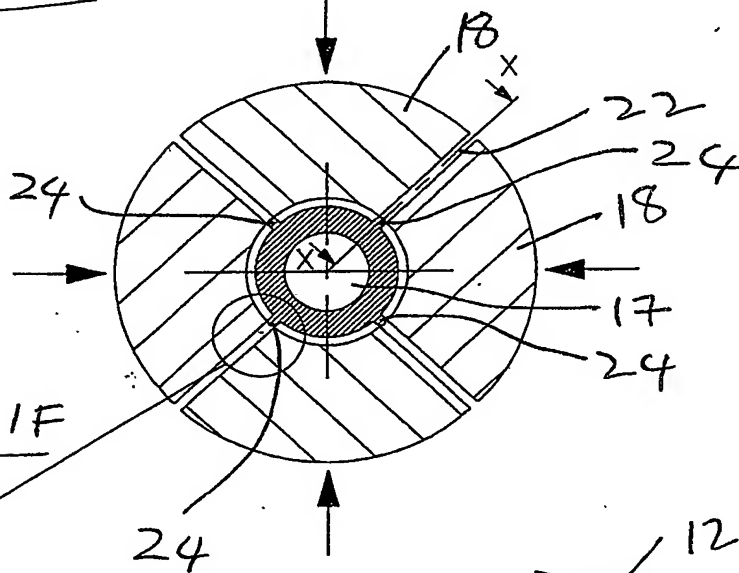


FIG. 1F

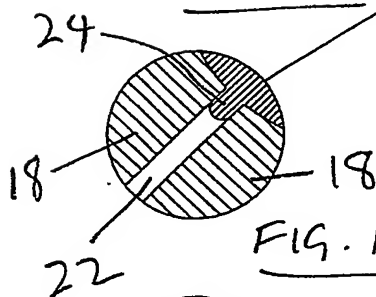


FIG. 1M

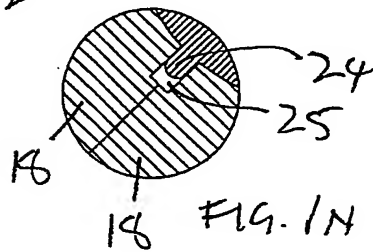


FIG. 1N

VIEW ON X-X

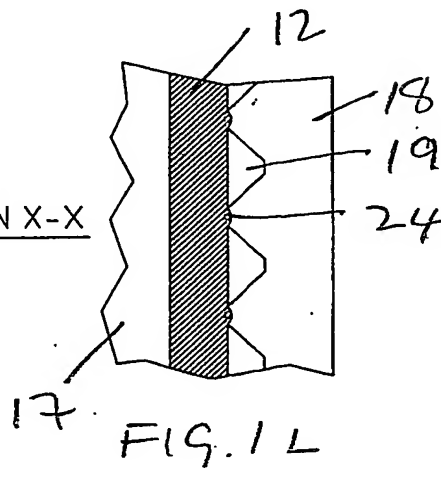


FIG. 1L

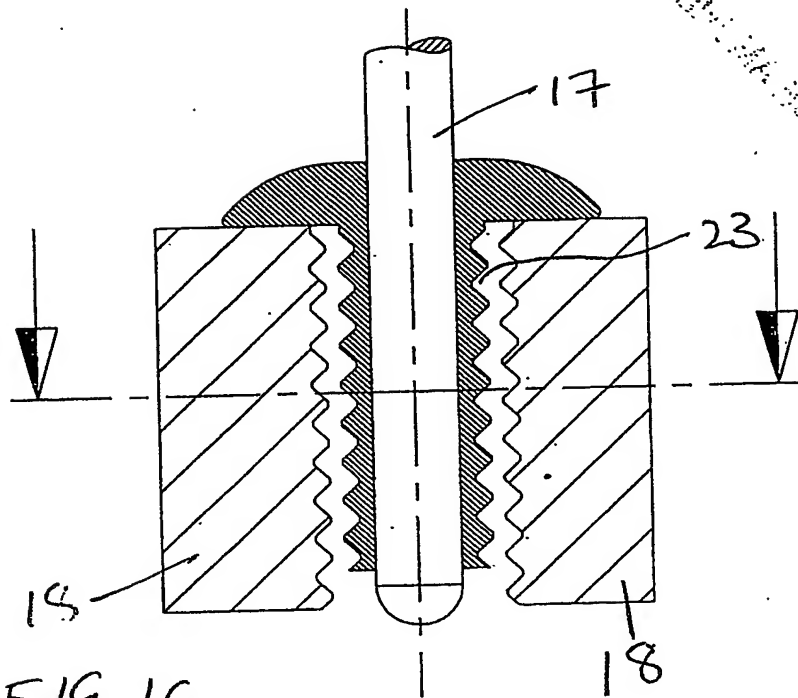


FIG. 19

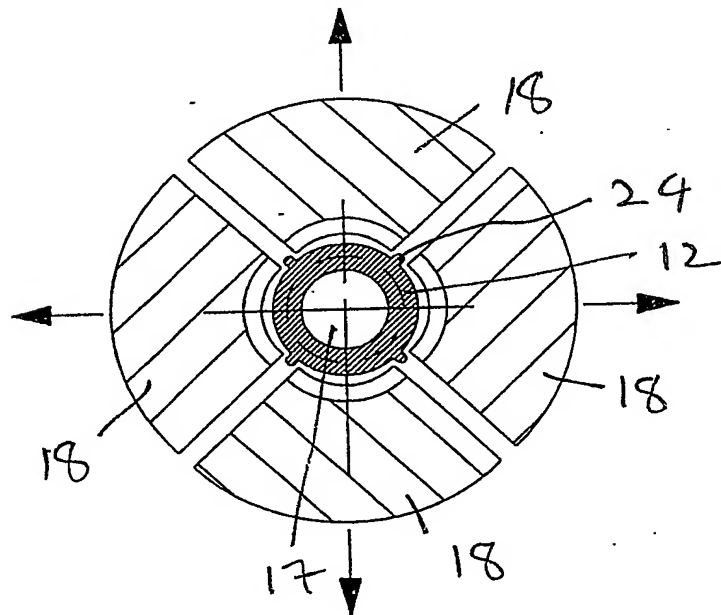


FIG. 1H

5/18

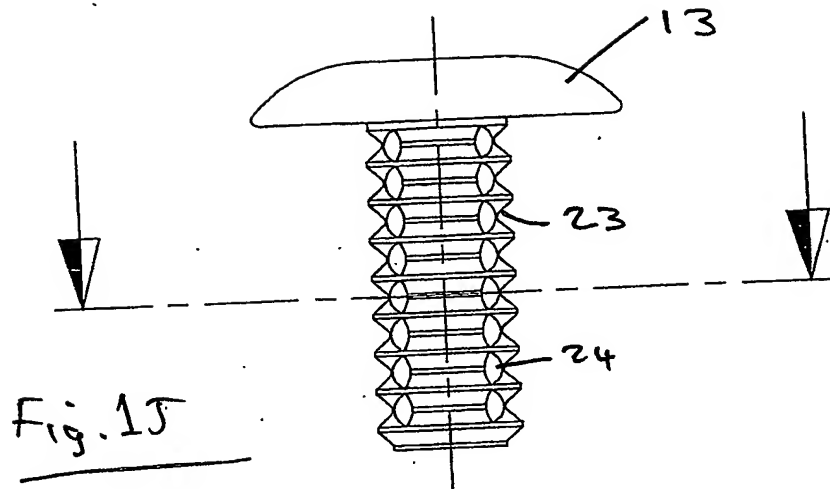


Fig. 15



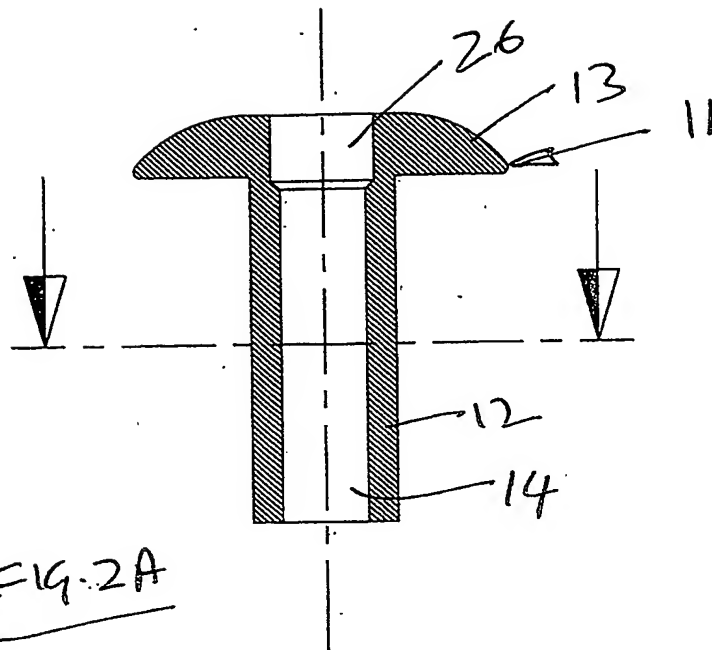
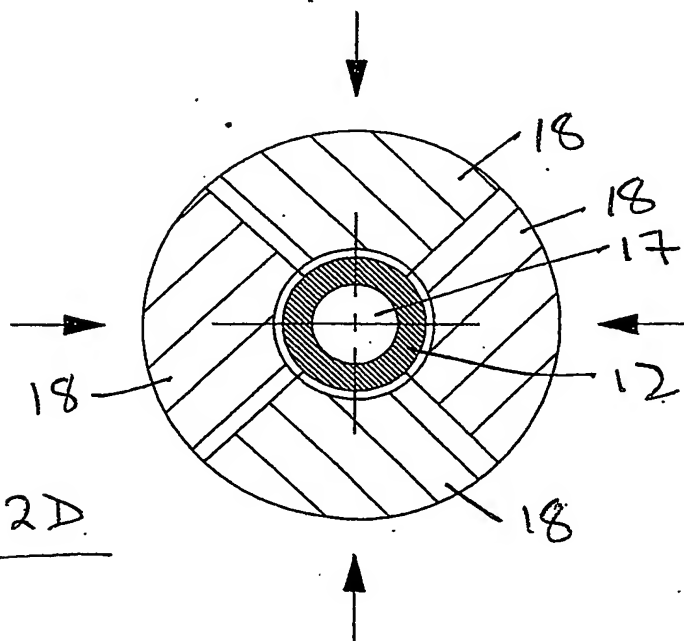


Fig. 14

6/18





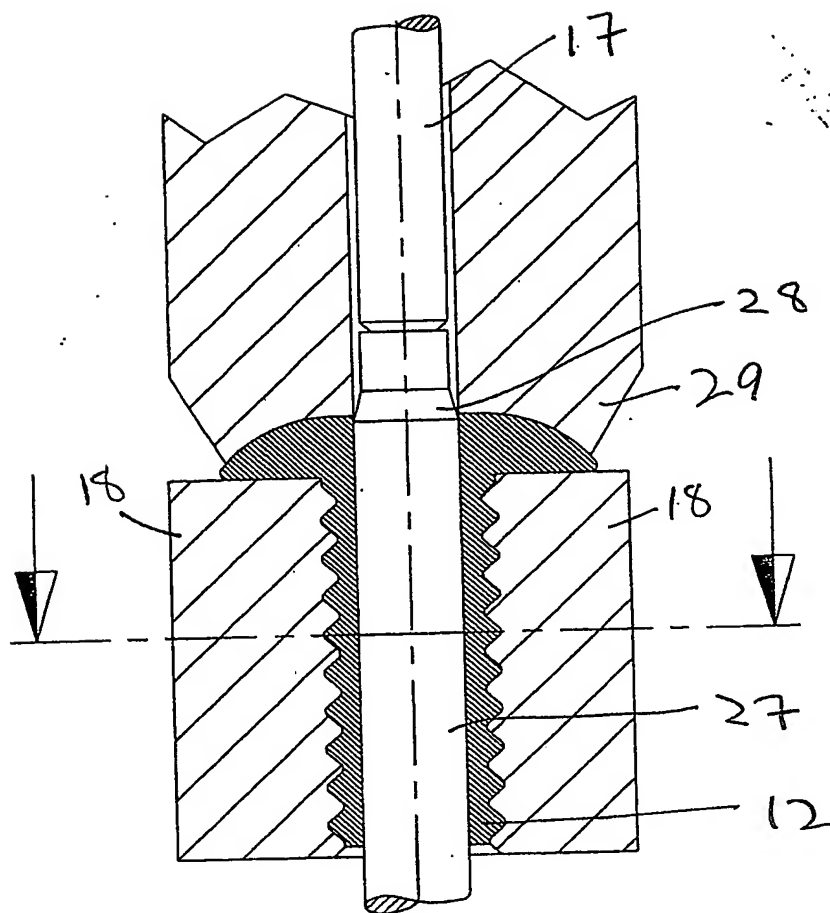


FIG. 2E

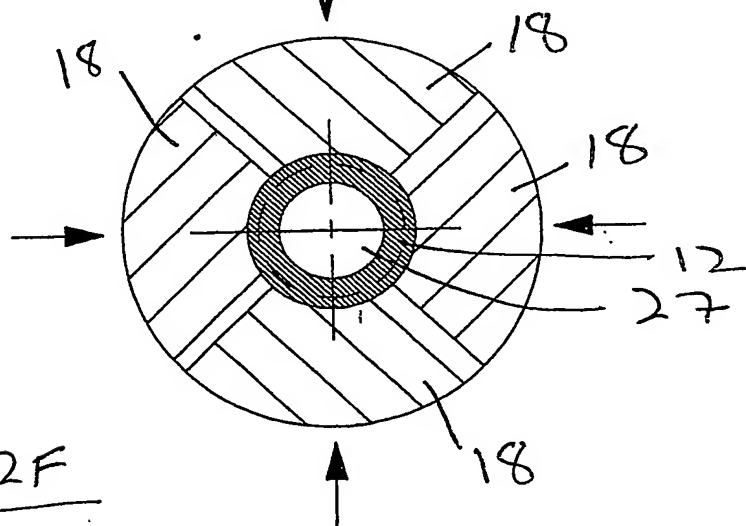


FIG. 2F

9/18

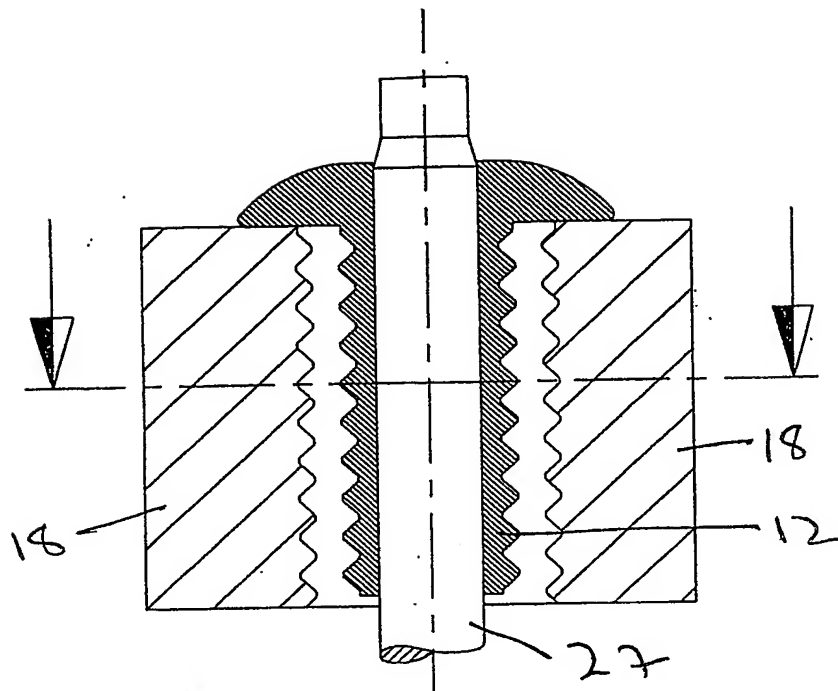


FIG. 29

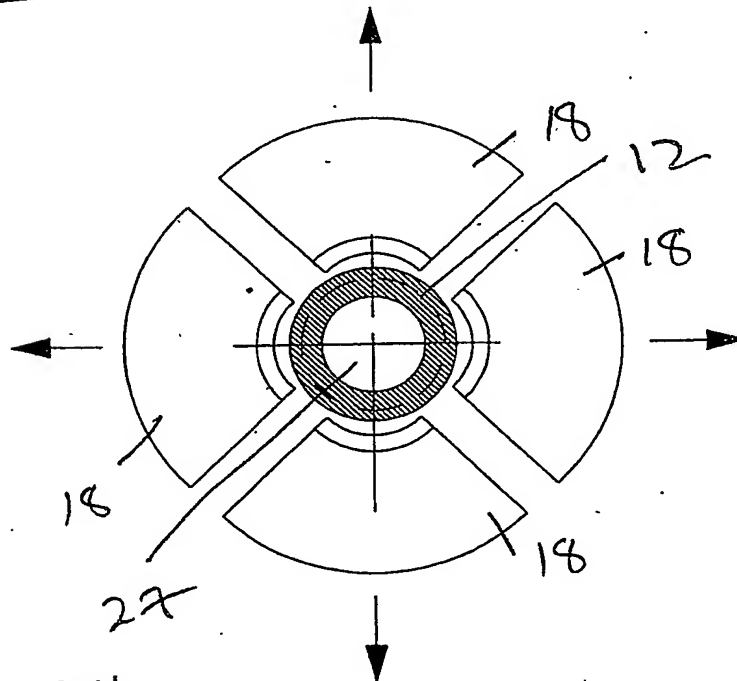


FIG. 24

10/18

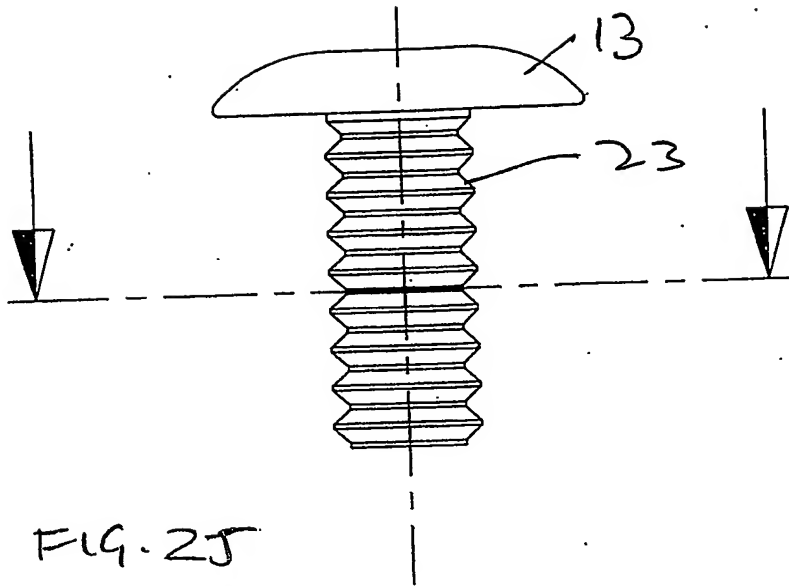


FIG. 2J





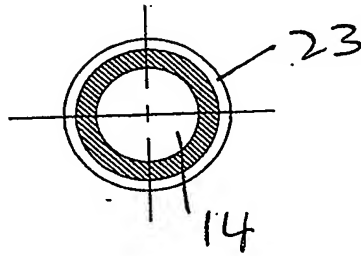




FIG. 2K

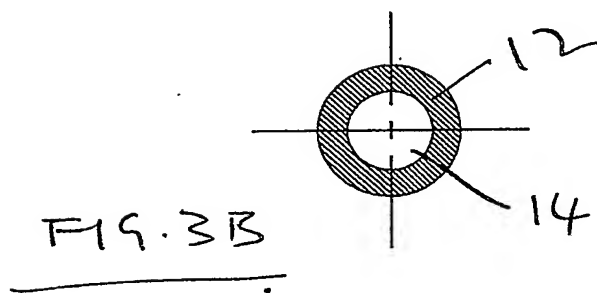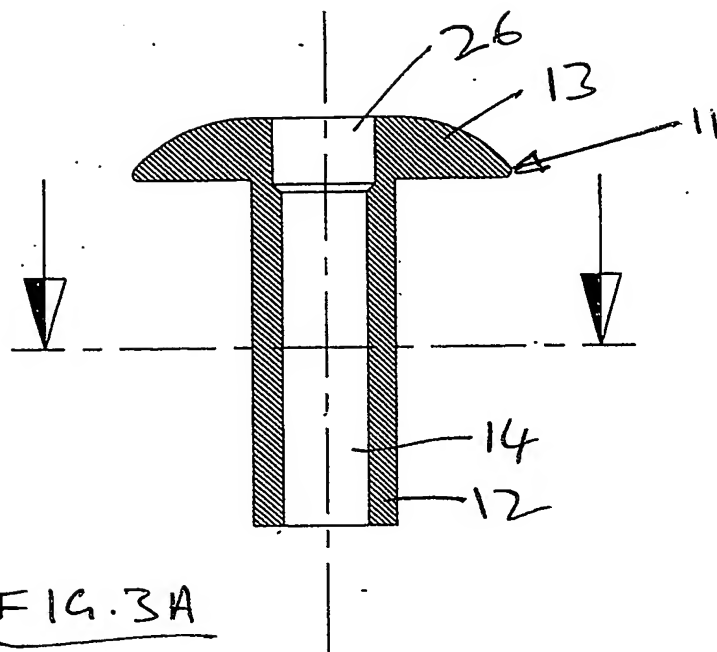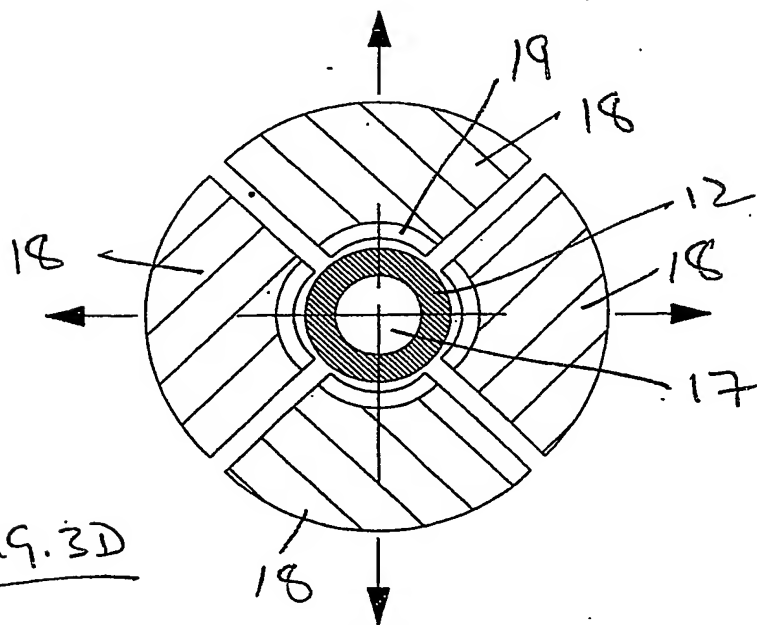


12/18

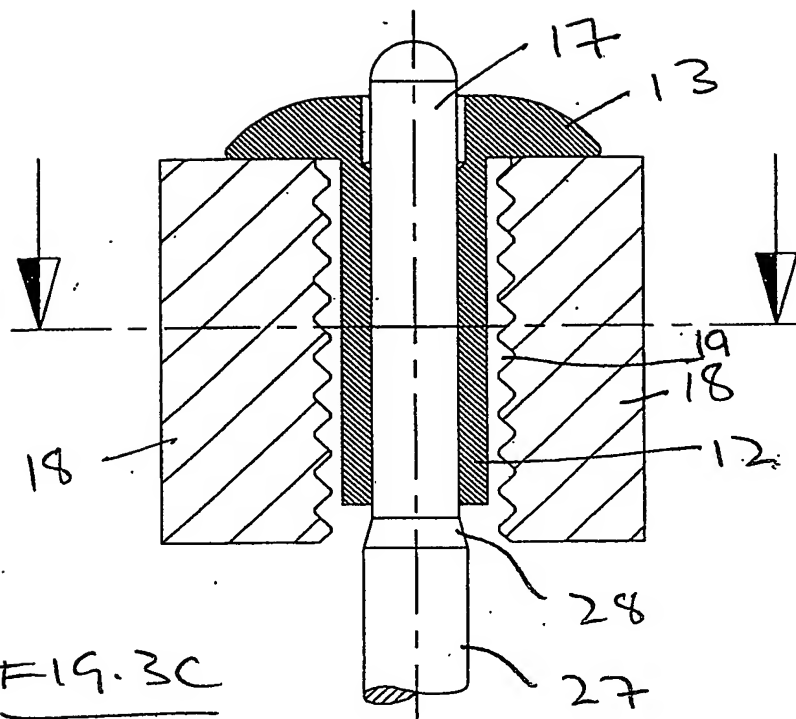

13/18

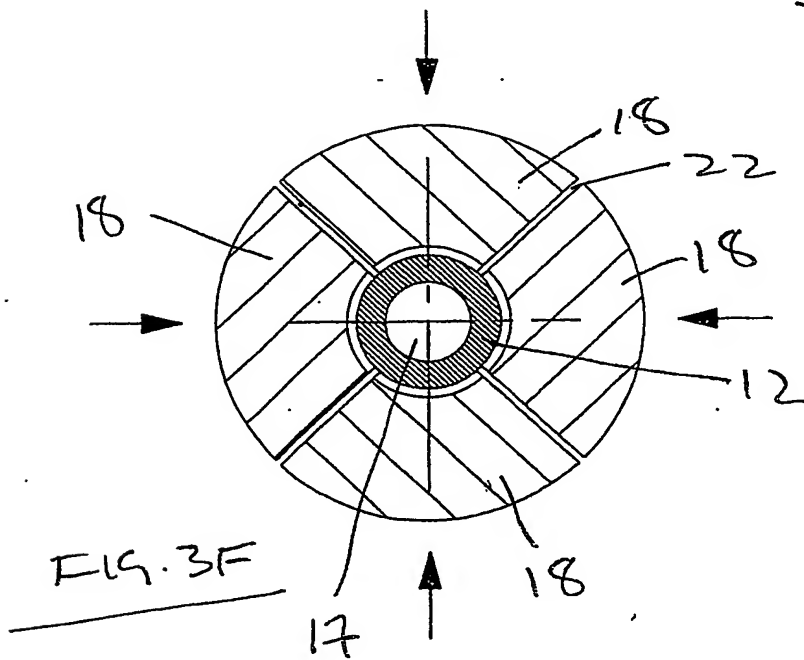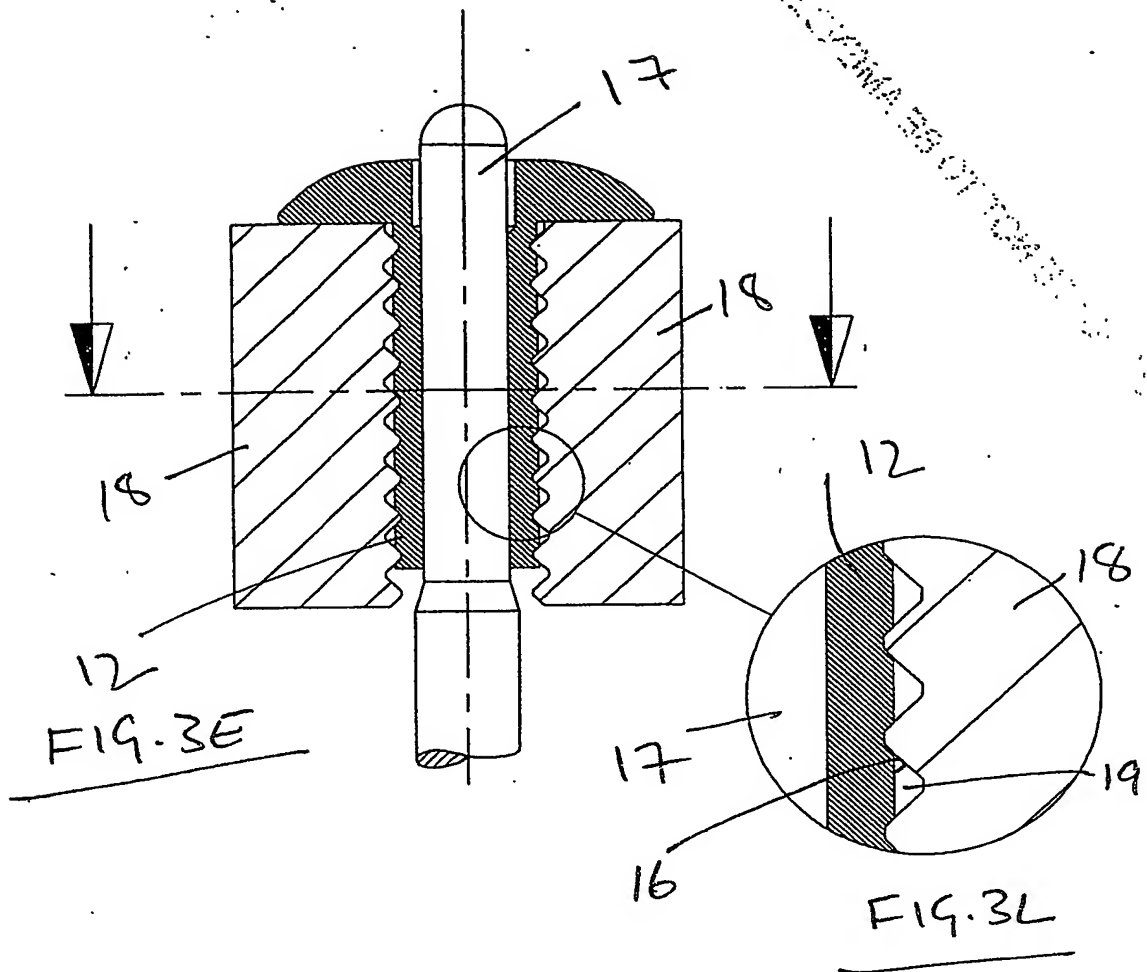

14/18

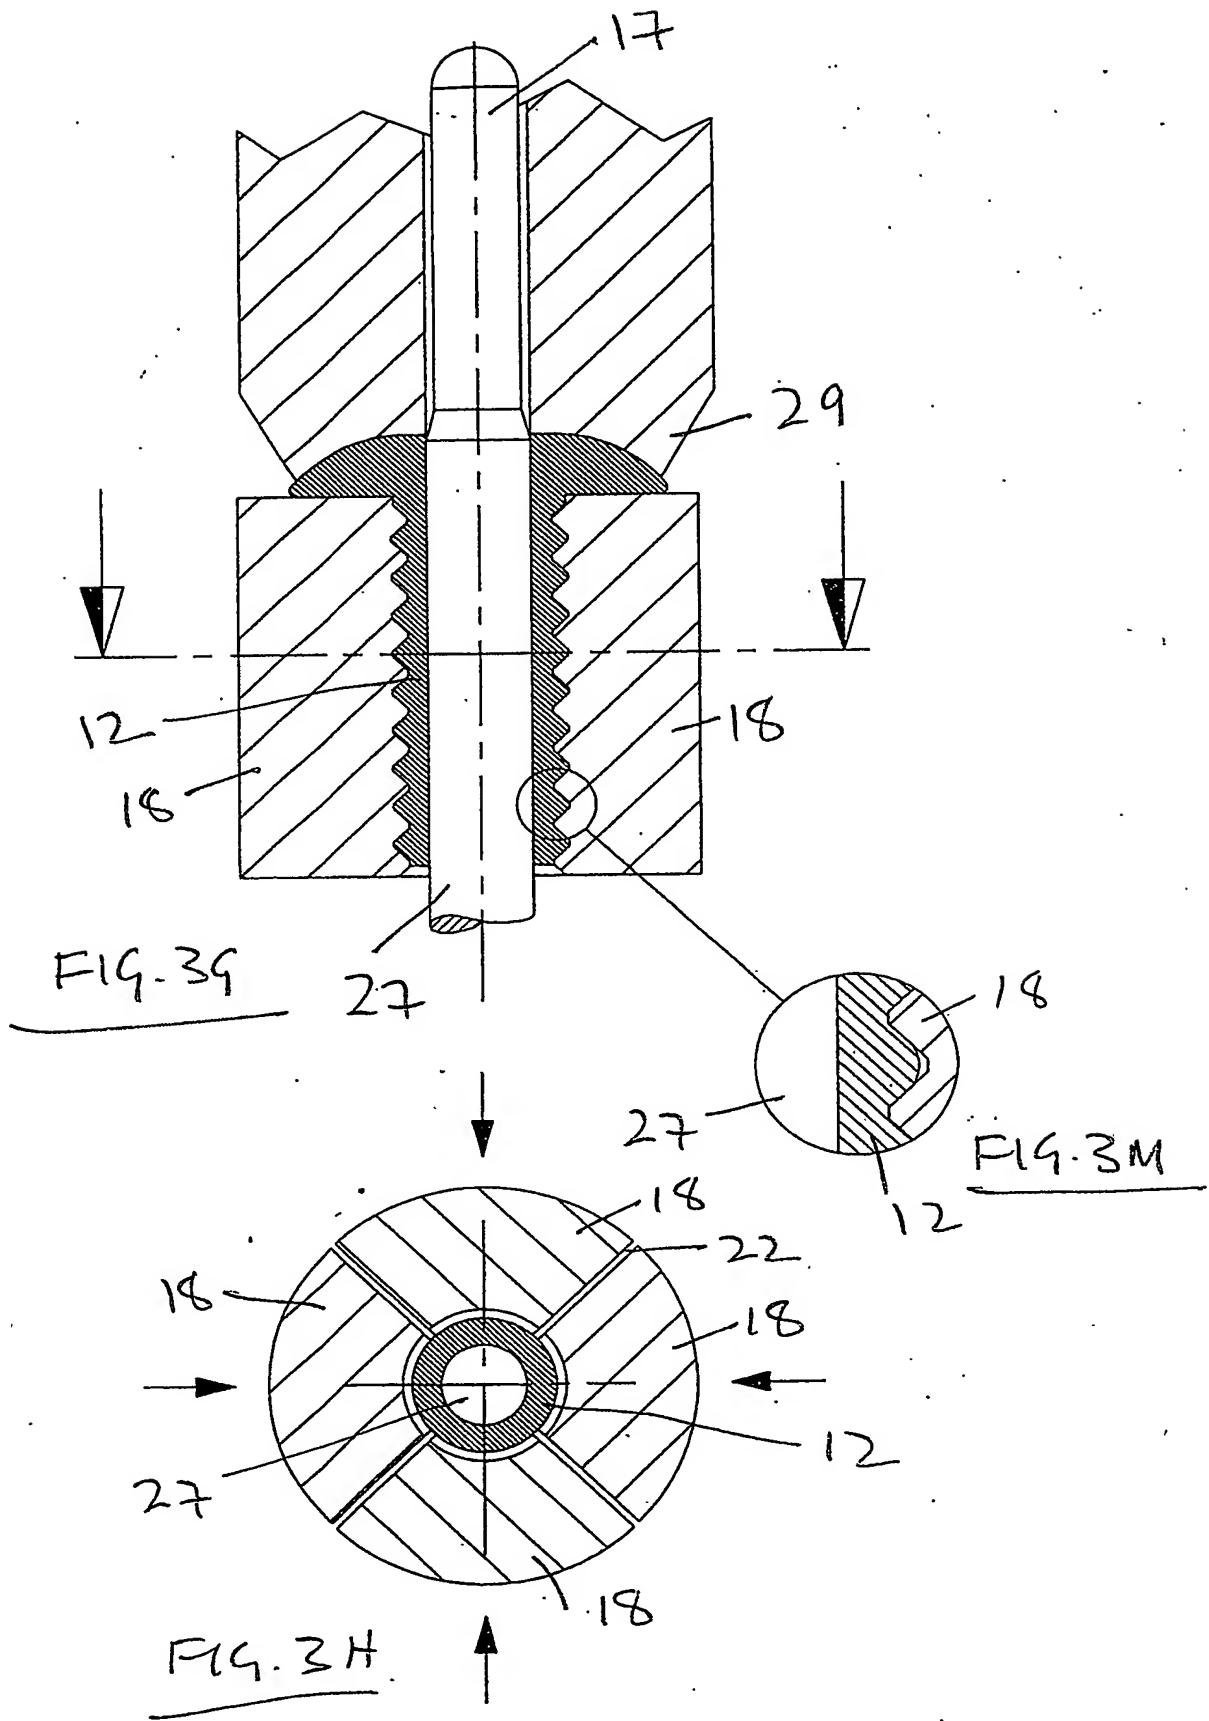

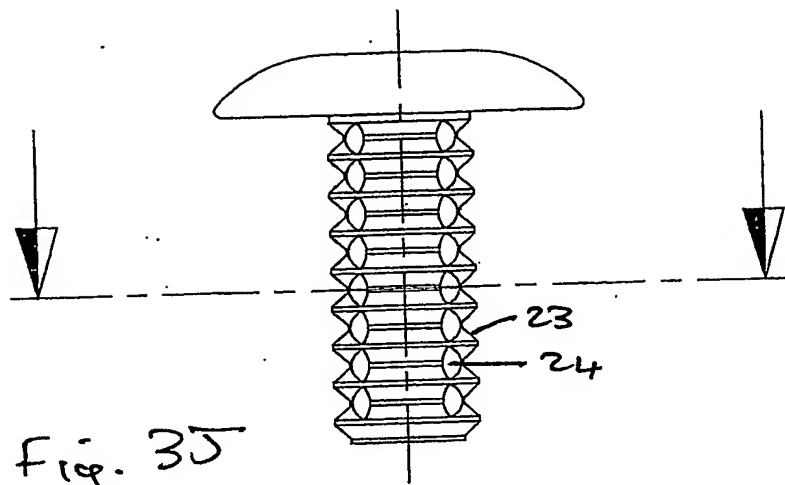


Fig. 3J




Fig. 3K

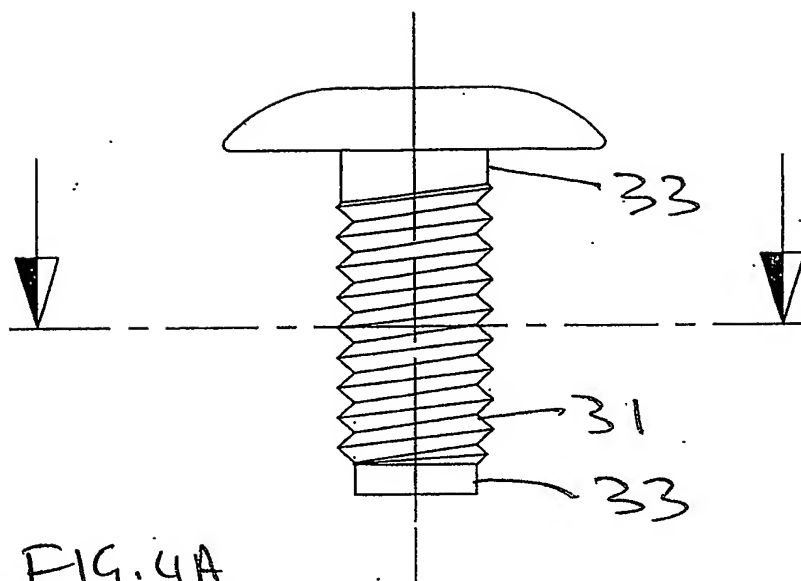


FIG. 4A

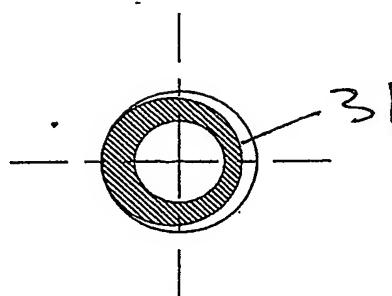


FIG. 4B

DISCLOSED TO THE PUBLIC

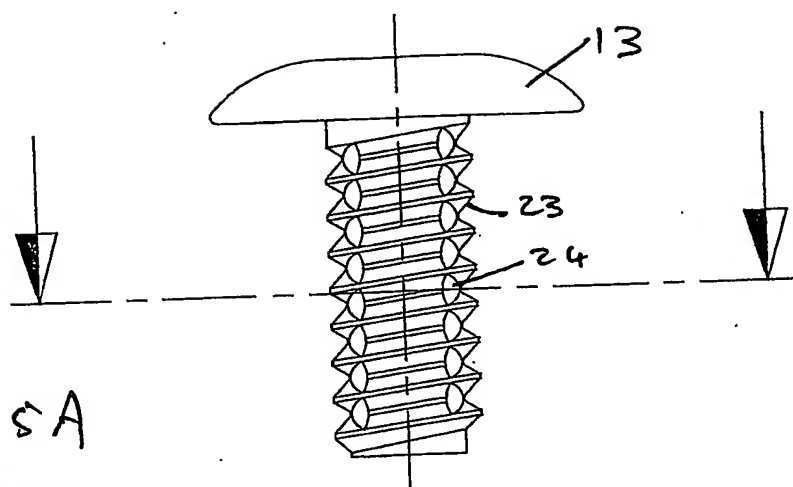


Fig. 5A




Fig. 5B

18/18


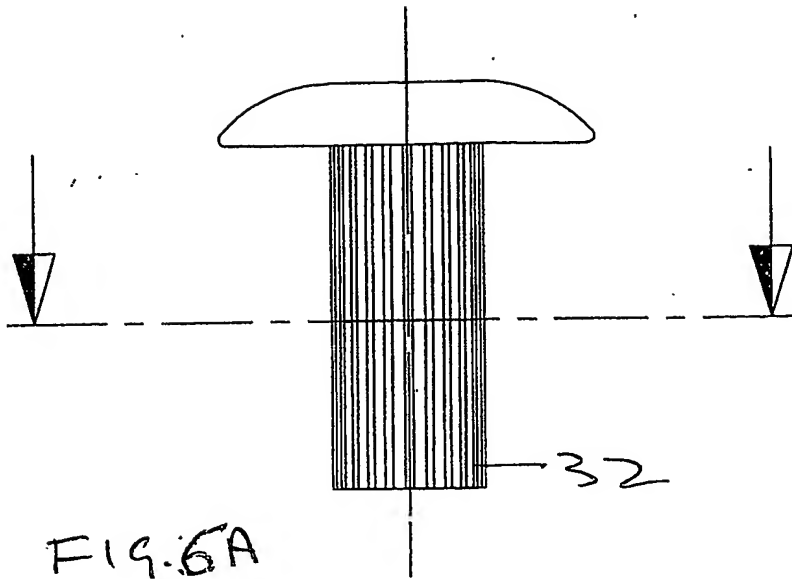


FIG. 6B

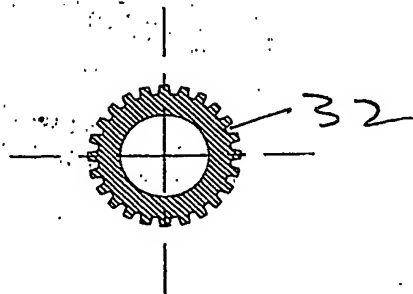

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.